


WITH 2 SPEED MOTOR AND 3 AXIS READ OUT, SEMI NORTON GEAR BOX. TURNING BAR WITH ADJUSTABLE CLUTCH.



FERVIplus

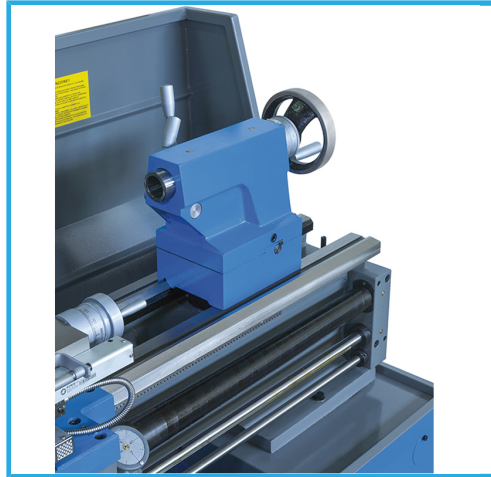

| | |
|---------------------------------------|-------------------------|
| Centers height | 200 mm |
| Max swing over the bed | 400 mm |
| Max swing over the cross slide | 258 mm |
| Max swing over the gap | 550 mm |
| Tool height | 20 mm |
| Distance between centers | 1000 mm |
| Spindle bore | 55 mm |
| Spindle bore | 50 mm |
| Spindle nose Camlock | Camlock D1-5 |
| Spindle bore taper MT | 6 |
| Spindle speed | (12) 45 - 2000 rpm |
| Longitudinal feeds | 0,06 - 2,78 mm/rev |
| Cross feeds | 0,01 - 0,72 mm/rev |
| Metric threads | 0,8 - 14 mm |
| Inch threads | 2 - 28 TPI |
| Tailstock taper MT | 4 |
| Motor | 400V 50 Hz 1,5 / 2,4 kW |
| Dimensions | 1860 x 800 x 1600 h mm |
| Net weight | 760 kg |
| Packaging dimensions | 1930 x 760 x 1600h mm |
| Gross weight | 815,00 kg |
| EAN Code | 8012667247331 |

Included

- 3+3 jaw self centering chuck Ø 200 mm
- 4 independent jaw chuck Ø 200 mm
- Reduction sleeve MT 6/4
- Face plate Ø 320 mm
- Follow rest
- Steady rest
- 2 x Dead center MT 4
- Live center MT 4
- Thread dial
- Leadscrew hood
- Turret guard
- Chuck safeguard
- Full length splash guard
- TOAB quick change tool post
- Working lamp
- Cooling system
- Foot brake
- Clutch on turning bar
- Quick locking tailstock carriage
- Wagon gears in oil bath