
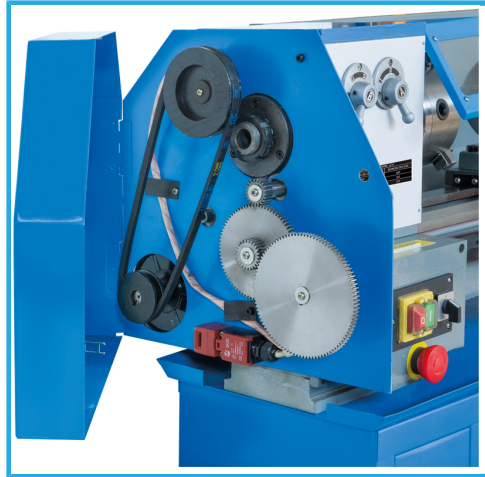


WITH SPEED CHANGE BY GEARS, MORSE TAPERED SPINDLE BEARINGS, ADJUSTABLE SIGNS, LEADSCREW HOOD, CHUCK GUARD WITH MICROSWITCH.

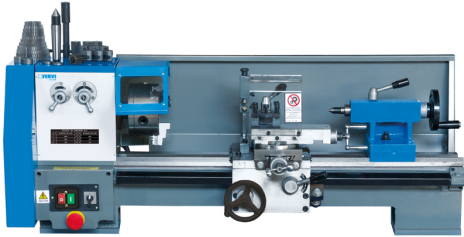

| | |
|---------------------------------------|----------------------|
| Centers height | 110 mm |
| Max swing over the bed | 200 mm |
| Max swing over the cross slide | 122 mm |
| Tool height | 12 mm |
| Distance between centers | 520 mm |
| Spindle bore | 20 mm |
| Spindle bore taper MT | 3 |
| Spindle speed | (6) 170 - 1950 rpm |
| Longitudinal feeds | 0,04 - 0,20 mm/rev |
| Metric threads | 0,25 - 3 mm |
| Inch threads | 8 - 48 TPI |
| Tailstock taper MT | 2 |
| Motor | 230 V 50 Hz 0,55 kW |
| Dimensions | 1080 x 440 x 400h mm |
| Net weight | 130 kg |
| Packaging dimensions | 1225x565x560 h mm |
| Gross weight | 143,50 kg |
| EAN Code | 8012667181864 |

Included

- 3+3 jaw self centering chuck Ø 125 mm
- Follow rest
- Dead center MT2
- Dead center MT3
- Thread dial
- Leadscrew hood
- Turret safeguard with micro switch
- Chuck safeguard
- Full length splash guard
- 4 side fix tool post 12 mm